

mirage D



POS RETAIL CREATIVE
POS-ITIVE RELIABLE PERFORMANCE
TRANSLUCENT UP TO 70%
EASY ASSEMBLY

mirage D

PRODUCT SPECIFICATIONS

		mirage D2600	mirage D3910	mirage D3910L	mirage D5210	mirage D10
Physical Pixel Pitch (V/H)	mm	5.208/2.604	7.813/3.906	7.813/3.906	5.208	10.417
Pixel Resolution (Width/Height)	pixels/panel	192/96	128/64	256/64	96/96	48/48
Panel Dimensions	(W x H x D) mm	500 x 500 x 90	500 x 500 x 90	1000 x 500 x 90	500 x 500 x 90	500 x 500 x 90
Standard Panel Area	m2	0.25	0.25	0.5	0.25	0.25
Standard Weight	kg/m2	18	18	11.2	18	18
Transparency	%	60	60	60	55	70
Ingress Protection	(Front/Rear)	Indoor IP20/IP30				
Maintenance Access		All Front (LED tiles)				
Standard Refresh Rate	Hz	≥3,840 (TBC)				
Uncalibrated Brightness*	nits	≥4500	≥4000	≥4000	≥4500	≥4500
Calibrated Brightness*	nits	N/A	N/A	N/A	N/A	N/A
Input Voltage	VAC/Hz	100~240/50-60				
Max Power Consumption**	W/sqm	800	760	640	760	960
Typical Working Power Consumption**	W/sqm	240	228	192	228	288
Operating Temperature (min/max)	degC	-10/+40				
Certification		CE (IEC82368-1), EMC, LVD, RoHS				
HDR***		(see foot note)				

All specifications are subject to change without prior notification. E&OE.

Specifications are for standard system configuration. Contact your digiLED expert for detailed specification.

*The figures shown for brightness are standard guidelines figures only and based on average test laboratory conditions.

** The figures shown for power consumption are standard guidelines figures only and based on average test laboratory conditions.

***HDR: Subject to system configuration and processing.


mirage D APPLICATIONS

APPLICATIONS

POS

Retail

Indoor Retail Store Fronts

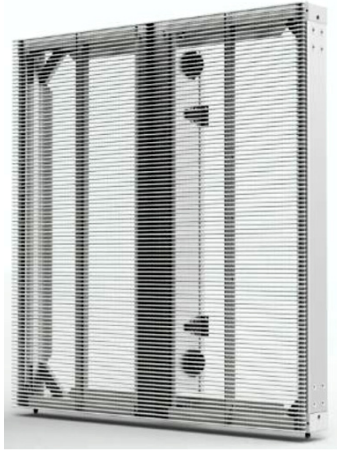

digiLED Application Experts

- Site surveys, install design & visuals
- Procurement / installation of screen surface & structures
- System commissioning & ongoing maintenance / warranty

